




Santo Tirso mounting instructions

01

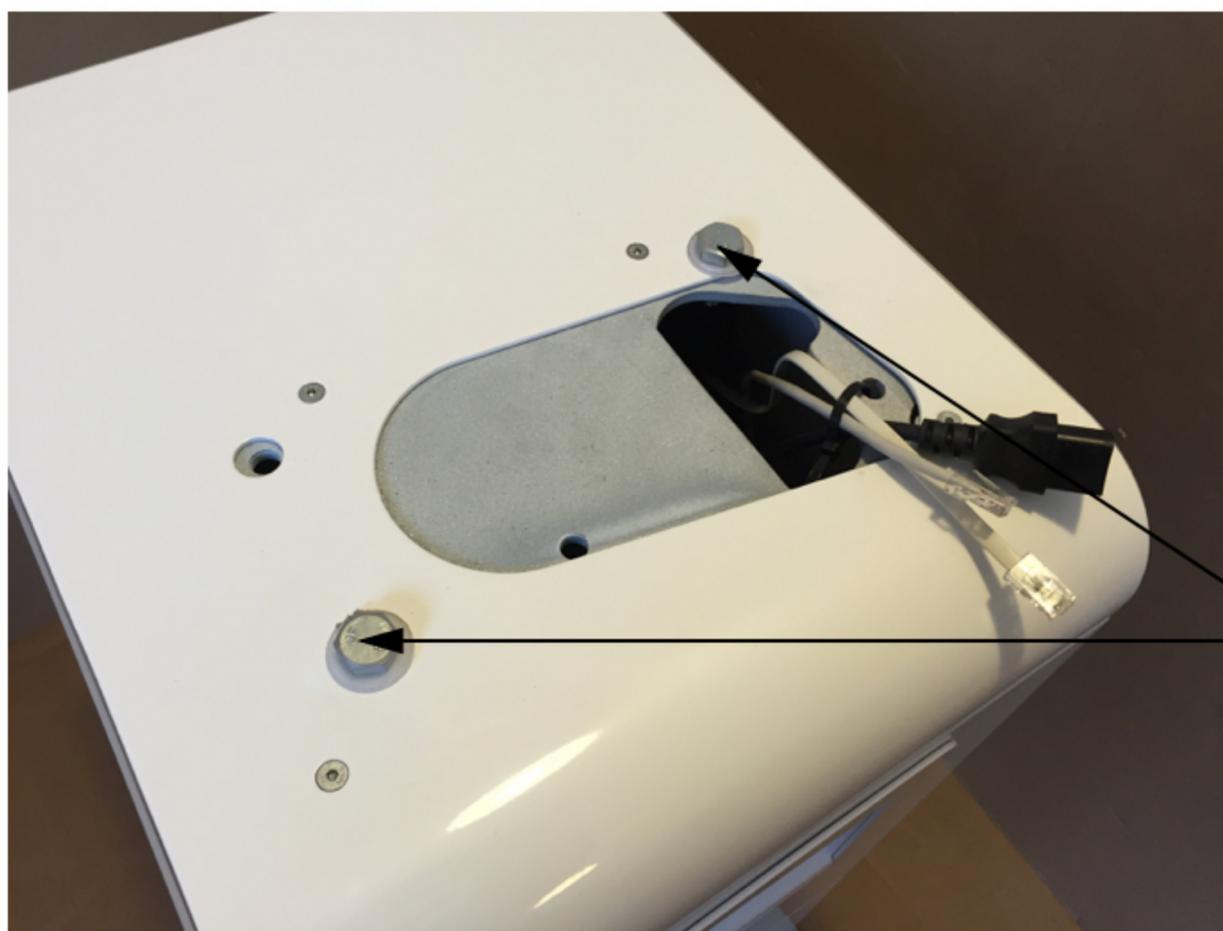

Remove transportation bolts

02




Cut off plastic cable tie

03



Insert key and open the front door

04

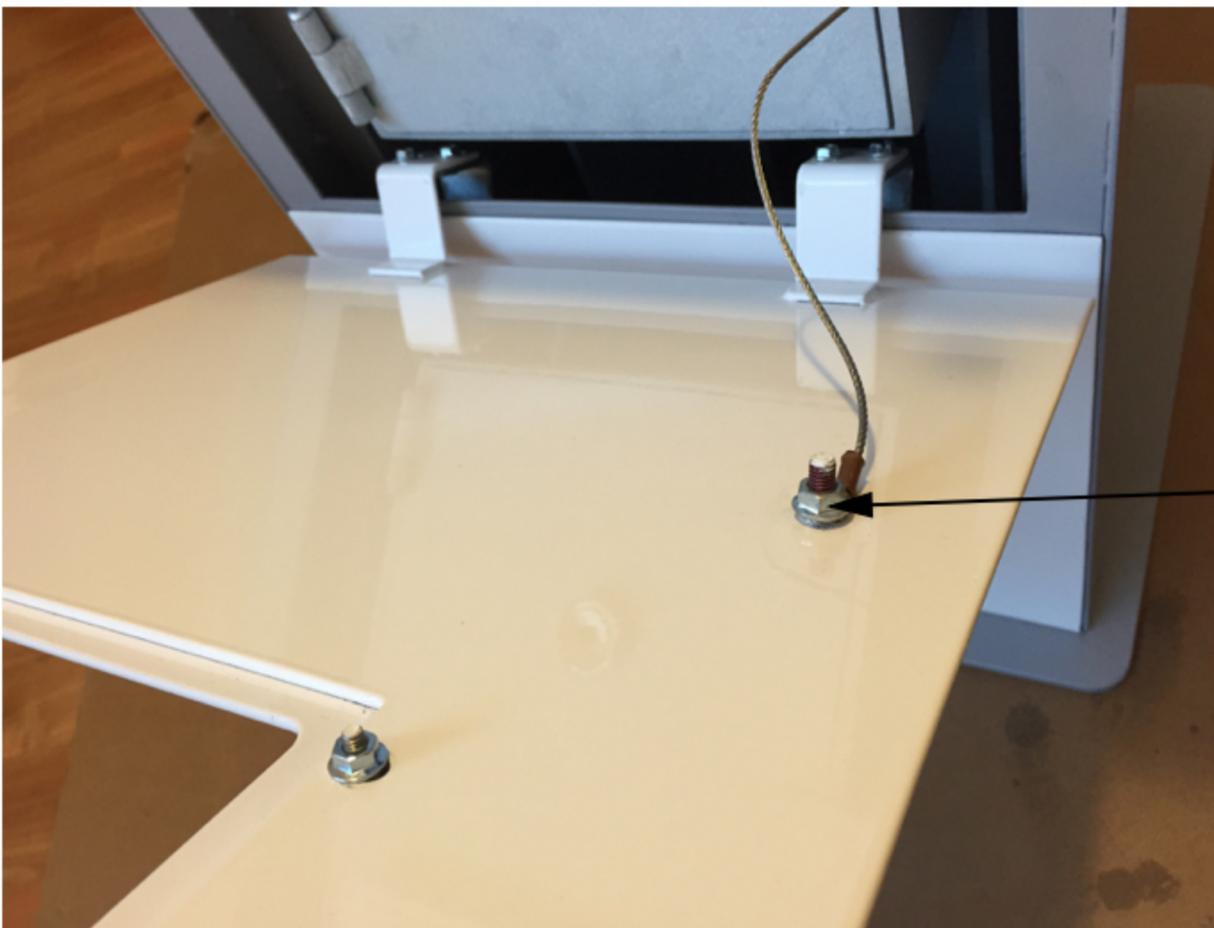

Remove nut




Remove both hinge pins




Slide the door to the left or right and remove it

06

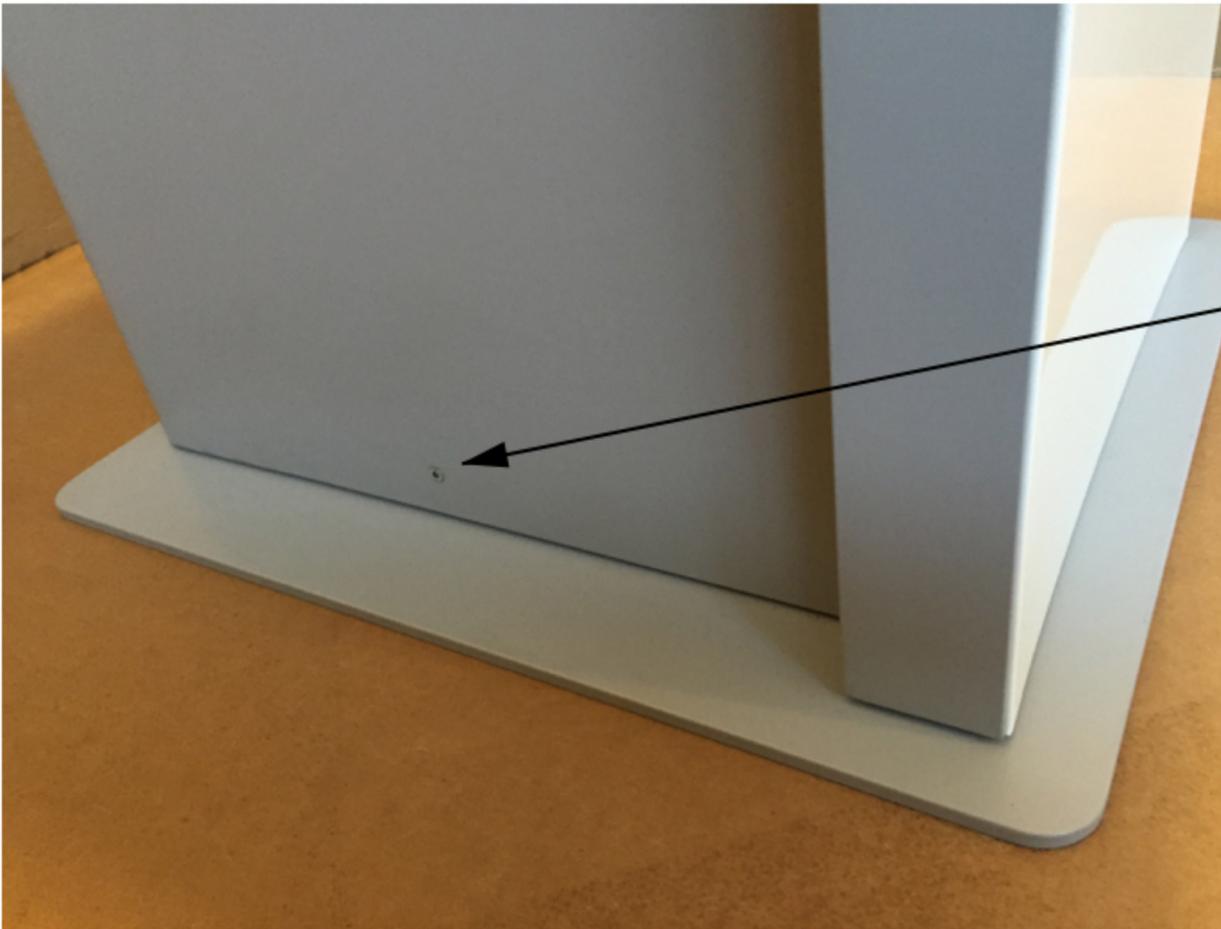


Remove side screws

07

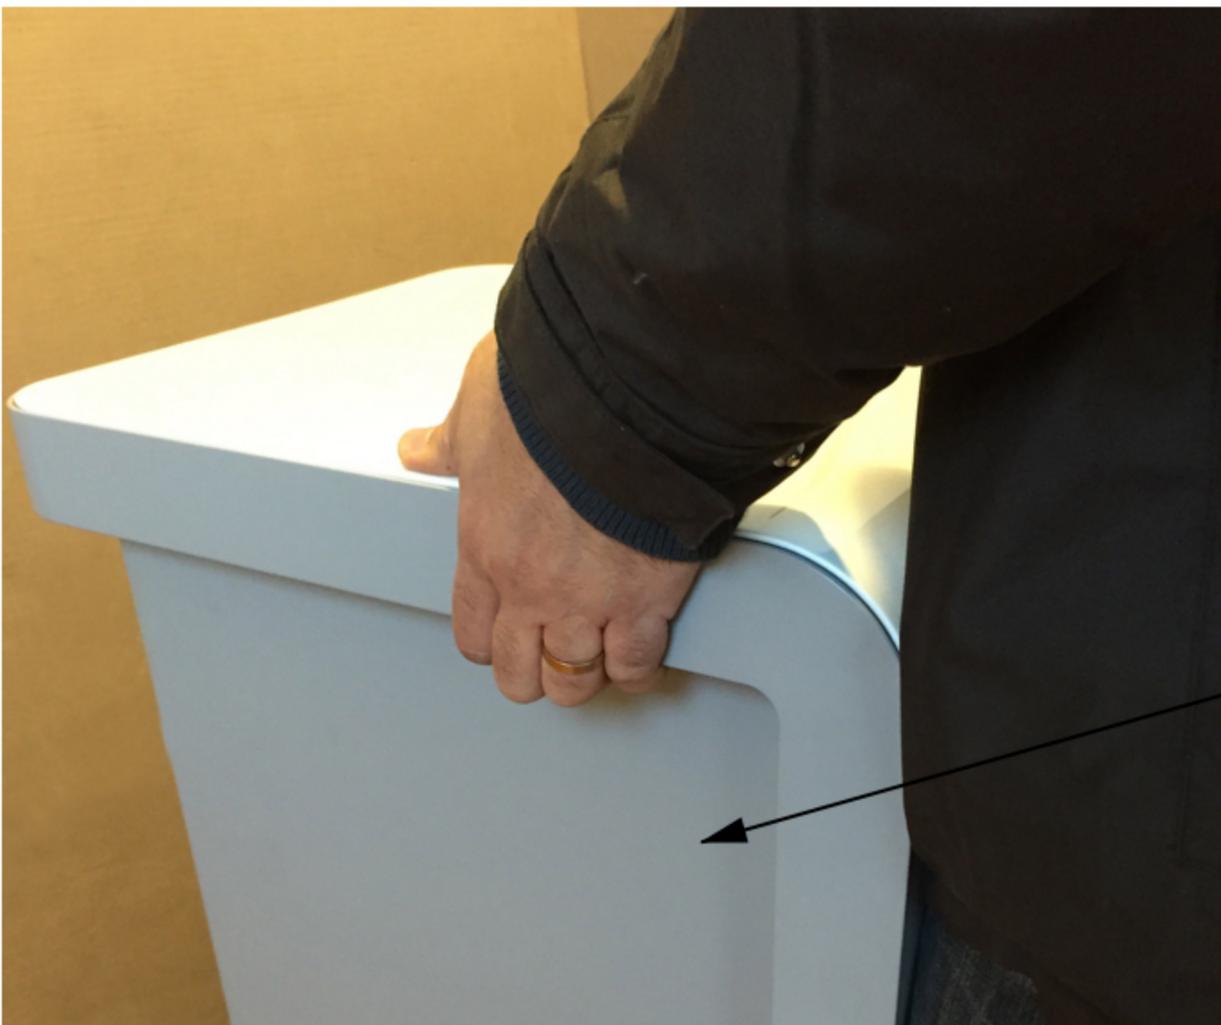


Lift the external housing

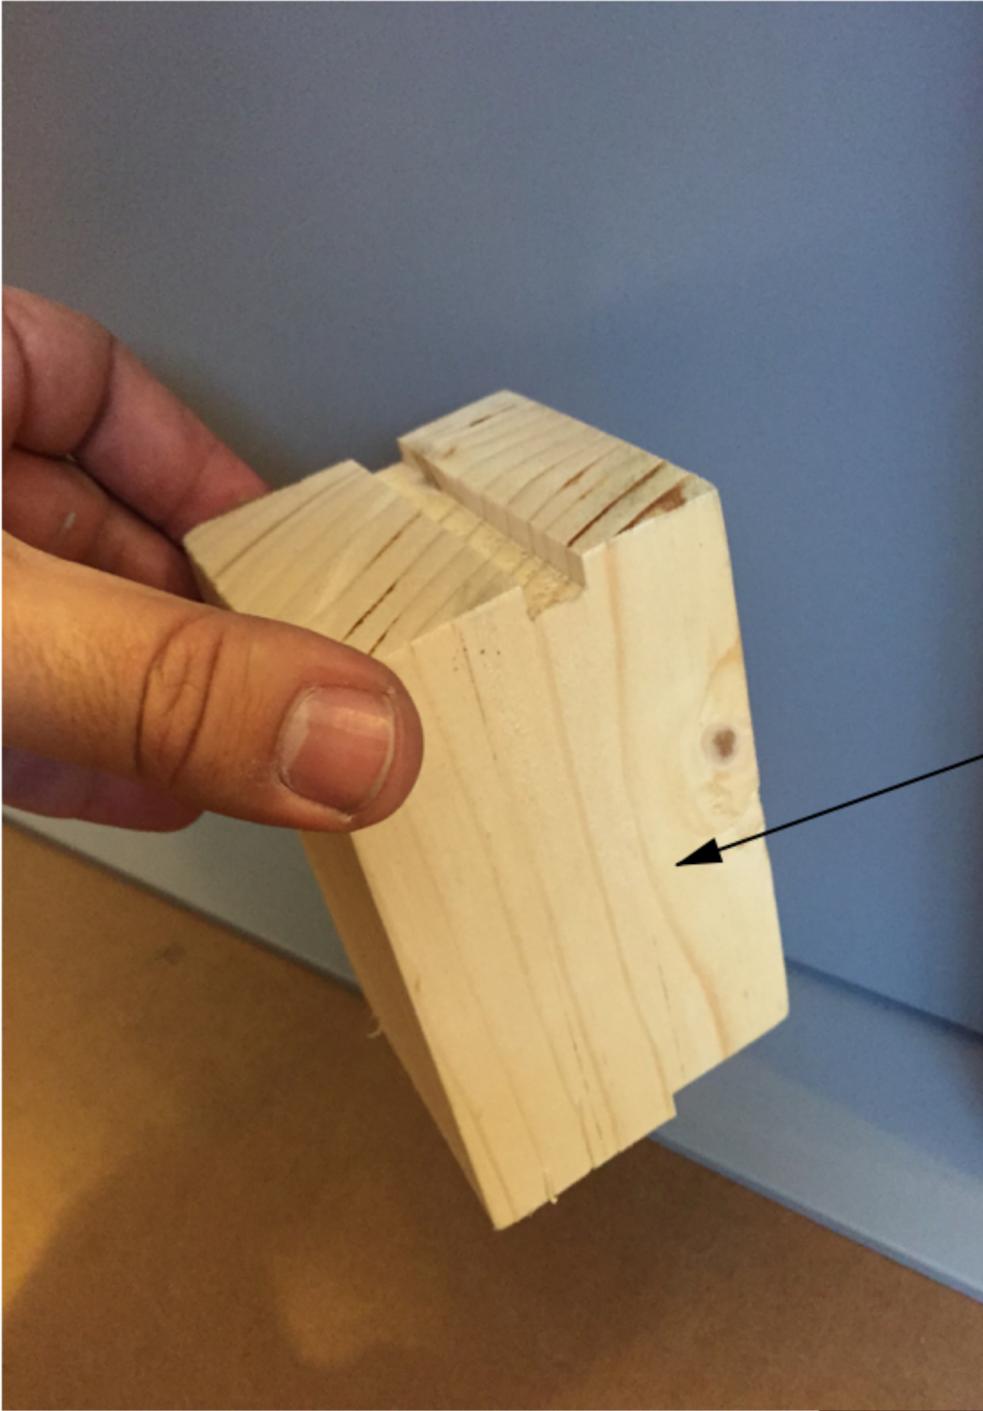

Insert the wood blocks
beneath the external housing



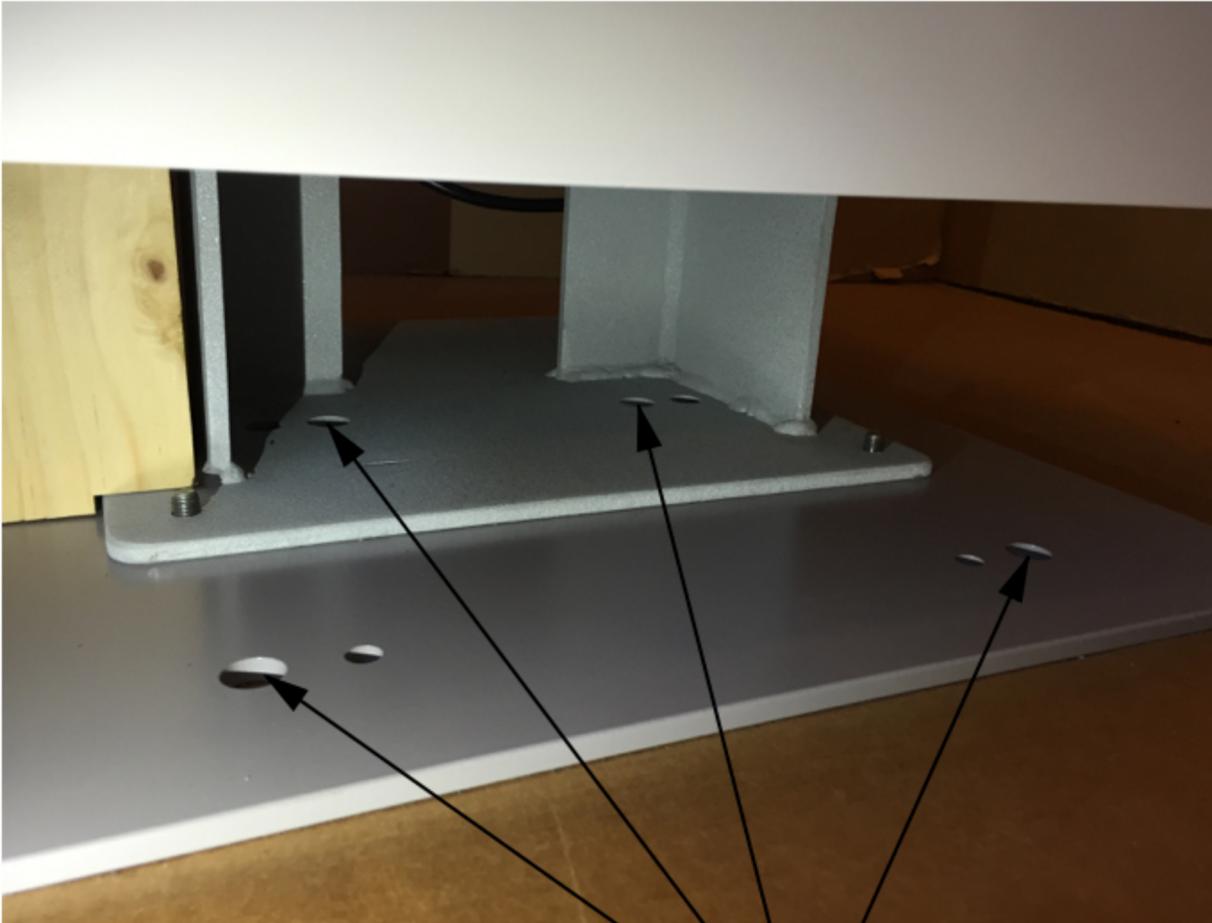

Fix the machine to the floor with provided M12 bolts and anchors.



Remove the wood blocks, insert the external housing and door in place reversing last steps.

Please make sure that the top holes and the mouth are fully aligned.

